


TECHNICAL DATA

SYSTEM 2000

1200 x 1000 x 990 mm

PRODUCT BENEFITS

- Robust, durable three-piece container
- Low container weight
- Non-slip sandwich folding
- Intuitive, fast, ergonomic handling
- Protection against water and dirt
- No manual locking required



Hang-in lid


- Saving of space at the place of use
- Extra ergonomics and easy handling

Visual inspection of empties

- Direct check of the completeness of all elements (sleeve contained in empties)



Scan and watch the application video.



Secure empty unit

- Protection of the folded sleeve
- No damage to the containers by slipping
- Safe and stable stacking



Integrated base insert*

- No loss of base insert, as firmly attached to the sleeve
- Fixation of sleeve with pallet in assembled, loaded condition

Safe stacking

- No tying necessary
- Fast, safe and uncomplicated stacking of the full and empty containers

*Container with integrated base insert, optionally available for System 2000.

KTP[®]
Packaging Solutions

TECHNICAL DATA

SYSTEM 2000

1200 x 1000 x 990 mm



Technical data

External dimensions:	1,200 x 1,000 x 990 mm
Internal dimensions:	1,140 x 940 x 800 mm
Volume:	873 l
Tare weight:	39 kg
Empties height:	205 mm in a stack
Folding system:	Sandwich folding
High rack (without base):	no

LOADS


Payload (max.):	250 kg
Stacking load (max.):	1,250 kg
Stacking factor (max.):	1+5

LOGISTICS AND TRANSPORT

Return rate:	1:4.7
Volume reduction:	79%


CAPACITY UTILISATION IN MEGA-TRAILER (13.6 x 2.48 x 3.0 m)

Full: 78

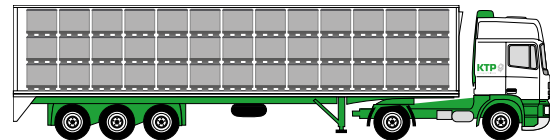

Empty: 364

79% VOLUME-REDUCED

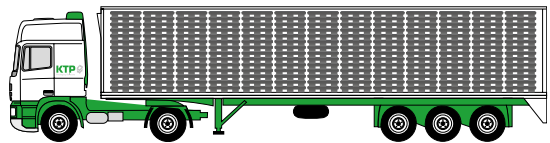

Storage positions: 26

1	2	3	4	5	6	7	8	9	10	11	12	13
14	15	16	17	18	19	20	21	22	23	24	25	26



SANDWICH	PALLET	SLEEVE	LID
Material	PE	PP	PE
Grammage	–	3000 g/m ²	–
Equipment* <small>*optional; further options available</small>	Open surface, 9 feet 4-way entry pallet Drainage holes	M-folding 1 flap door 600 x 350 mm 2 label holders A5 Integrated base insert *	2 handles, black Suspension lugs Control opening

You can get on request further options like a higher or lower sleeve, additional flap doors, individual printing, tracking systems as well as customized inside packaging solutions - just contact us.

1+5
IN BLOCK STORAGE

1+4

3x **14x**
IN THE MEGA-TRAILER

1:4,7 PROPORTIONALLY
STACKABLE

STACKING LOAD WITH DOUBLE SAFETY
TESTED AT
-20 °C to +50 °C