## **TECHNICAL DATA**

# SYSTEM 2000 SMARTFIX® **1000 x 600 x 695 mm**

## **PRODUCT BENEFITS**

- Super-fast folding technique
- Sliding lid
- Extremely simple handling
- Firmly connected components
- Protection against water and dirt
- No manual locking required



## **TECHNICAL DATA**

## SYSTEM 2000 **SMARTFIX®** 1000 x 600 x 695 mm




#### **TECHNICAL DATA**

External dimensions: Internal dimensions: Volume:	1,000 x 600 x 695 mm 933 x 534 x 515 mm 257 l
Tare weight: Empties height:	23 kg 205 mm in a stack
Folding system:	Sandwich folding
High rack (without base):	no
LOADS	
Payload (max.):	250 kg
Stacking load (max.):	1,000 kg
Stacking factor: (with max. payload and stacking load	)
LOGISTICS AND TRANSPOR	т
Return rate:	1:3.5

## **Return rate:** Volume reduction:


#### CAPACITY UTILISATION IN MEGA-TRAILER (13.6 x 2.48 x 3.0 m) Full: 208





### **Empty:** 728





#### Storage positions: 52

								_				_
1	2	3	4	5	6	7	8	9	10	11	12	13
						20						
27	28	29	30	31	32	33	34	35	36	37	38	39
40	41	42	43	44	45	46	47	48	49	50	51	52






71%





SANDWICH	PALLET	SLEEVE	LID		
Material	PE	PP	PE		
Grammage	-	3000 g/m <sup>2</sup>	-		
Equipment* *optional; further options available	Open surface, 8 feetIIII4-way entry palletIIIIIDrainage holesIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	2 label holders A5	2 handles, black Suspension lugs Control opening		

You can get on request further options like a higher or lower sleeve, additional flap doors, individual printing, tracking systems as well as customized inside packaging solutions - just contact us.

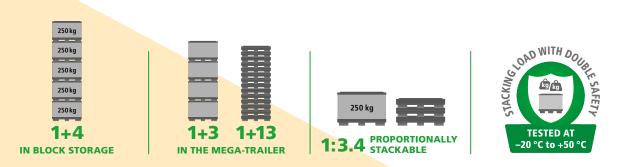

KTP Kunststoff Palettentechnik GmbH | Saarstraße 1, 66359 Bous | T +49 6834 9210 - 0 | info@ktp-online.de | www.ktp-online.de Rev 001 | 01-2021 | Subject to changes and errors. Please observe our manufacturing tolerances according to DIN 16901. Tested on the basis of VDA 4520.