TECHNICAL DATA

SYSTEM 2000 SMARTFIX® **1500 x 1200 x 755 mm**

PRODUCT BENEFITS

- Super-fast folding technique
- Extremely easy handling
- Sliding lid
- Firmly connected components
- Protection against water and dirt
- No manual locking required



Safe guidance

• Embedded guide rails simplify handling – the lid is neatly guided when opening and closing.

Firm connection

• Lid and sleeve form a firmly connected unit – no more individual parts, no more loss of container parts





O



Safe stacking • No tying necessary • Fast, safe and uncomplicated

stacking of the full and empty containers





Secure empty unit

- Protection of the folded sleeve
- No damage to the containers by slipping
- Safe and stable stacking



Scan for more information.



Integrated base insert*

- No loss of base insert, as firmly attached to the sleeve
- Fixation of sleeve with pallet in assembled, loaded condition

*optionally available

TECHNICAL DATA

SYSTEM 2000 SMARTFIX® **1500 x 1200 x 755 mm**




TECHNICAL DATA

External dimensions:	1,500 x 1,200 x 755 mm		
Internal dimensions:	1,430 x 1,130 x 575 mm		
Volume:	929		
Tare weight:	54 kg		
Empties height:	210 mm in a stack		
Folding system:	Sandwich folding		
High rack (without base):	no		
LOADS			
Payload (max.):	250 kg		
Stacking load (max.):	1,250 kg		
Stacking factor:	1+4		
(with max. payload and stacking	load)		


LOGISTICS AND TRANSPORTReturn rate:1:3.5Volume reduction:71%

CAPACITY UTILISATION IN MEGA-TRAILER (13.6 x 2.48 x 3.0 m) Full: 72



Empty: 252





Storage positions: 17

1	2	3	4	5	6	7	8	9
10	11	12	13	14	15	16	17	18








SANDWICH	PALLET	SLEEVE	LID
Material	PE	РР	PE
Grammage	-	3000 g/m ²	-
Equipment* further options available	Open surface, 9 feet	M-folding 2 label holders A5 Integrated base insert *	2 handles, black 2 handles, blue

You can get on request further options like additional flap doors, individual printing, tracking systems as well as customized inside packaging solutions – just contact us.

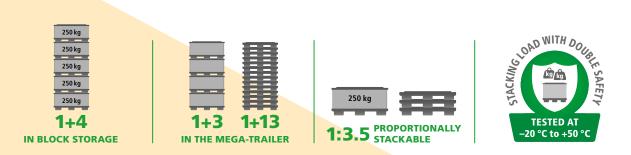

KTP Kunststoff Palettentechnik GmbH | Saarstraße 1, 66359 Bous | T +49 6834 9210 - 0 | info@ktp-online.de | www.ktp-online.de Rev 003 | 06-2022 | Subject to changes and errors. Please observe our manufacturing tolerances according to DIN 16901. Tested on the basis of VDA 4520.