


TECHNICAL DATA

SYSTEM 2000

1600 x 1200 x 750 mm

PRODUCT BENEFITS

- Robust, durable three-piece container
- Low container weight
- Non-slip sandwich folding
- Intuitive, fast, ergonomic handling
- Protection against water and dirt
- No manual locking required



Hinged lid

- Saving of space at the place of use
- Extra ergonomics and easy handling

Visual inspection of empties

- Direct check of the completeness of all elements (sleeve contained in empties)




Scan for more information.



Secure empty unit

- Protection of the folded sleeve
- No damage to the containers by slipping
- Safe and stable stacking



Integrated base insert*

- No loss of base insert, as firmly attached to the sleeve
- Fixation of sleeve with pallet in assembled, loaded condition



Safe stacking

- No tying necessary
- Fast, safe and uncomplicated stacking of the full and empty containers

*optionally available

KTP[®]
Packaging Solutions

TECHNICAL DATA

SYSTEM 2000 1600 x 1200 x 750 mm



TECHNICAL DATA

External dimensions:	1,600 x 1,200 x 750 mm
Internal dimensions:	1,540 x 1,140 x 560 mm
Volume:	983 l
Tare weight:	51 kg
Empties height:	230 mm in a stack
Folding system:	Sandwich folding
High rack (without base):	no

LOADS


Payload (max.):	350 kg
Stacking load (max.):	1,250 kg
Stacking factor: (with max. payload and stacking load)	1+3

LOGISTICS AND TRANSPORT

Return rate:	1:3
Volume reduction:	67%


CAPACITY UTILISATION IN MEGA-TRAILER (13.6 x 2.48 x 3.0 m)

Full: 64

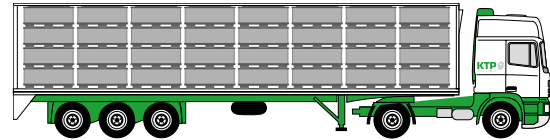

Empty: 192

67% VOLUME-REDUCED

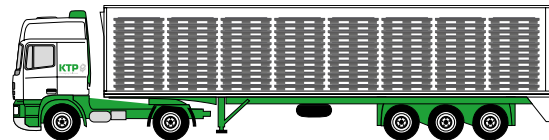

Storage positions: 16

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16



SANDWICH	PALLET	SLEEVE	LID
Material	PE	PP	PE
Grammage	–	3000 g/m ²	–
Equipment* further options available	Open surface, 9 feet 4-way entry pallet Drainage holes	M-folding 2 label holders A5 Integrated base insert *	6 handles, black

You can get on request further options like additional flap doors, individual printing, tracking systems as well as customized inside packaging solutions – just contact us.

