### **TECHNICAL DATA**

# SYSTEM QUAD DUO 1230 x 1020 x 990 mm

### **PRODUCT BENEFITS**

- Volume reduction despite inner packaging
- Extremely stable pallet design
- High payloads possible
- Intuitive, fast and ergonomic handling
- Protection against water and dirt
- No manual locking required



#### Hang-in lid

- Saving of space at the place of use
- Extra ergonomics and easy handling

#### Secure empty unit

- Protection of the folded sleeve
- No damage to the containers
- by slipping

71

Safe and stable stacking



Scan for more information.



Robust pallet footFirm, one-piece connection of foot and pallet

- High level of stability suitable for high rack and roller conveyor
- Drainage holes



#### **Return collar**

- Ideal for the return of inside packaging
- All parts remain together in the container



Closed pallet deck

No soiling
No base insert required



## **TECHNICAL DATA**

# SYSTEM QUAD DUO 1230 x 1020 x 990 mm



### **TECHNICAL DATA**

Volume reduction:

External dimensions:	1,230 x 1,020 x 990 mm
Internal dimensions:	1,175 x 965 x 790 mm
Volume:	896
Tare weight:	51 kg
Empties height:	235 mm in a stack
Folding system:	Sandwich folding
High rack (without base):	yes
LOADS	
Payload (max.):	400 kg
Stacking load (max.):	1,250 kg
Stacking factor:	1+3
(with max. payload and stacking lo	oad)
LOGISTICS AND TRANSPO	ORT
Return rate:	1:4


### CAPACITY UTILISATION IN MEGA-TRAILER (13.6 x 2.48 x 3.0 m) Full: 78



**VOLUME-**

REDUCED

### Empty: 312



### Storage positions: 26

1	4	2	3	4	5	6	7	8	9	10	11	12	13
14	1	5	16	17	18	19	20	21	22	23	24	25	26






75 %



SANDWICH	PALLET	SLEEVE	LID
Material	PE	PP	PE
Grammage	-	3000 g/m <sup>2</sup>	-
Equipment further options available	Closed surface, 4 feet 4-way entry pallet Return collar 100 mm, riveted to pallet, Drainage holes	M-folding 1 flap door 800 x 350 mm 2 label holders A5	2 handles, black Suspension lugs

You can get on request further options like a higher or lower sleeve, additional flap doors, individual printing, tracking systems as well as customized inside packaging solutions - just contact us.

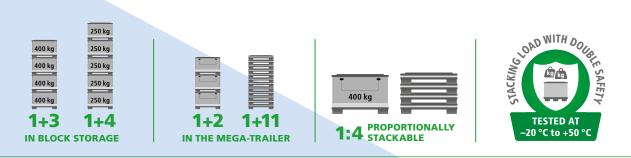

**KTP Kunststoff Palettentechnik GmbH** | Saarstraße 1, 66359 Bous | T +49 6834 9210 - 0 | info@ktp-online.de | www.ktp-online.de Rev 001 | 11-2019 | Subject to changes and errors. Please observe our manufacturing tolerances according to DIN 16901. Tested on the basis of VDA 4520.