

## TECHNICAL DATA

# CARRIER SYSTEM SYSTEM QUAD

## 1200 x 800 mm

## PRODUCT BENEFITS

- Non-slip transportation of all common EPP, KLT and Euro-stacking box systems
- 4-foot pallet with steel insert, suitable for higher payloads and high rack storage
- No stretching or tying required
- Replacement for steel flat pallets and Euro wooden pallets – the clean and light alternative

### TECHNICAL DATA


Basic dimensions:	1,200 x 800 mm
Tare:	35 kg
Payload (max.):	750 kg
High rack (without base – max. 500kg):	yes



### CAPACITY UTILISATION IN MEGA-TRAILER (13.6 x 2.48 x 3.0 m)

Storage positions: 33

1	2	3	4	5	6	7	8	9	10	11
12	13	14	15	16	17	18	19	20	21	22
23	24	25	26	27	28	29	30	31	32	33



	PALLET	LID	OPTIONS*
Material	PE	PE	<ul style="list-style-type: none"> <li>• Additional lashing systems, as 2-fold or 4-fold elements for small stackable containers (VDA) and foam containers (EPP/EPE).</li> <li>• Coloured markings, individual lettering</li> <li>• Stackable with KTP System 2000 1230x830x935 mm</li> </ul>
Grammage	–	–	
Equipment	Closed surface, 4 feet Steel reinforced 4-way entry pallet Drainage holes 	2 handles, red	

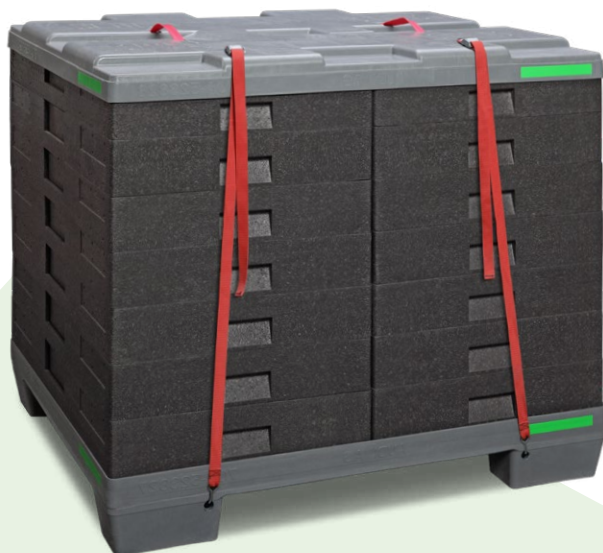

#### Safety

Additional lashing systems\* (optionally) make sure that everything remains firmly in place. They are available as 2-fold or 4-fold elements.



#### Stability

The raised pallet edge prevents the load carriers from slipping. This ensures optimum stacking.



#### Marking

All pallets can be identified by coloured markings\* (optionally) and individual lettering.