

## TECHNICAL DATA

# SYSTEM 2000

**1600 x 1200 x 980 mm**

## PRODUCT BENEFITS

- Robust, durable three-piece container
- Low container weight
- Non-slip sandwich folding
- Intuitive, fast, ergonomic handling
- Protection against water and dirt
- No manual locking required



### Hinged lid

- Saving of space at the place of use
- Extra ergonomics and easy handling

### Visual inspection of empties

- Direct check of the completeness of all elements (sleeve contained in empties)



Scan for more information.



### Secure empty unit

- Protection of the folded sleeve
- No damage to the containers by slipping
- Safe and stable stacking



### Integrated base insert\*

- No loss of base insert, as firmly attached to the sleeve
- Fixation of sleeve with pallet in assembled, loaded condition



### Safe stacking

- No tying necessary
- Fast, safe and uncomplicated stacking of the full and empty containers

\*optionally available

**KTP**<sup>®</sup>  
Packaging Solutions

# TECHNICAL DATA

## SYSTEM 2000

### 1600 x 1200 x 980 mm



#### TECHNICAL DATA

External dimensions:	1,600 x 1,200 x 980 mm
Internal dimensions:	1,540 x 1,140 x 790 mm
Volume:	1387 l
Tare weight:	54 kg
Empties height:	230 mm in a stack
Folding system:	Sandwich folding
High rack (without base):	nein

#### LOADS


Payload (max.):	350 kg
Stacking load (max.):	1,250 kg
Stacking factor:	1+3
<small>(with max. payload and stacking load)</small>	

#### LOGISTICS AND TRANSPORT

Return rate:	1:4
Volume reduction:	75%


#### CAPACITY UTILISATION IN MEGA-TRAILER (13.6 x 2.48 x 3.0 m)

Full: 48

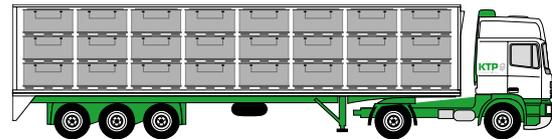

Empty: 192

**75% VOLUME-REDUCED**

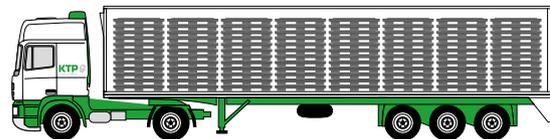

Storage positions: 16

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16



SANDWICH	PALLET	SLEEVE	LID
Material	PE	PP	PE
Grammage	–	3000 g/m <sup>2</sup>	–
Equipment* <small>further options available</small>	Open surface, 9 feet 4-way entry pallet Drainage holes	M-folding 1 flap door 800 x 350 mm 2 label holders A5 Integrated base insert*	6 handles, black

You can get on request further options like additional flap doors, individual printing, tracking systems as well as customized inside packaging solutions – just contact us.

**1+4 1+3**  
IN BLOCK STORAGE

**1+2 1+11**  
IN THE MEGA-TRAILER

**1:4** PROPORTIONALLY STACKABLE

STACKING LOAD WITH DOUBLE SAFETY  
TESTED AT -20 °C to +50 °C